



UniMAP

**FAULT LOCATION ALGORITHM BASED ON ANN
FOR
SINGLE LINE-TO-GROUND FAULT IN MV
DISTRIBUTION SYSTEM**

By

ALI ADIL ABDALGANE

(1532221572)

A dissertation submitted in partial fulfillment of the requirements for the
Degree of Master of Science (Electrical Power Engineering)

**School of Electrical System Engineering
UNIVERSITI MALAYSIA PERLIS**

2016

ACKNOWLEDGMENT



First and foremost, I am most thankful to Allah S.W.T for giving me the strength, health and time to complete my thesis dissertation. I would like to express my special acknowledgement and deepest appreciation to my supervisor, **Dr. Mohd Rafi Bin Adzman** for his kindness, encouragement, enthusiasm and support towards the completion of this Masters project.

Special thanks to School of Electrical System Engineering. I also want to thank to all lecturers in, School of Electrical System Engineering, Universiti Malaysia Perlis for all the knowledge they shared, gave to me, the guidance and the friendly attitude to me when I need them.

I am extremely heartfelt and grateful to my parents for their love, prayers, caring and sacrifices for educating and preparing me for my future. Also, I express my thanks to my brothers, and all my family for their support and valuable prayers. My Special thanks goes to my friends those who were directly or indirectly supported me throughout the whole duration of my Project dissertation.

Last but not least, with deepest love I am appreciative to my beloved wife to her patient and support during my study and travel. Also, many thanks to my sweetheart my son “Hussien”, whom I had not seen until now because of my travel to complete my studies

Thanks all a lot.

TABLE OF CONTENTS

	PAGE
DECLARATION OF THESIS	i
ACKNOWLEDGEMENT	ii
TABLE OF CONTENTS	iii
LIST OF TABLES	vi
LIST OF FIGURES	vii
LIST OF ABBREVIATIONS	ix
ABSTRAK	xi
ABSTRACT	xii
CHAPTER 1 INTRODUCTION	
1.1 Introduction	1
1.2 Single Line to Ground Fault	2
1.3 Problem Statement	4
1.4 Research Objectives	5
1.5 Scope of Research	5
1.6 Organization of the Thesis	6
CHAPTER 2 LITERATURE REVIEW	
2.1 Introduction	7
2.2 Wavelet Method	8
2.3 Fourier Transform Method	9
2.4 Differential Equation Method	10
2.5 Impedance Method	11
2.6 Traveling Wave Method	12
2.7 Circuit Theory Based Method	15
2.8 Signal Injection Method	18
2.9 Compositive Location Method	20
2.10 Zero Sequence Component Based Method	22

2.11	Artificial Intelligence Method	23
2.12	Summary	23

CHAPTER 3 RESEARCH METHODOLOGY

3.1	Introduction	25
	Design Medium Voltage Network	27
3.2.1	Alternative Transient Program (ATP/EMTP)	28
3.2.2	Solidly Neutral Earthed System	29
3.2	Design Solidly Neutral Earthed MV network	29
3.3	Simulate MV Network	32
3.3.1	Current Wave Methods	33
3.3.2	Fast Fourier Transfer (FFT) in MATLAB	35
3.4	Artificial Neural Network	37
3.5	Summary	40

CHAPTER 4 RESULT AND DISCUSSION

4.1	Introduction	41
4.2	Simulation Results	43
4.2.1	Fault Branch and Phase Detection	43
4.2.2	Fault location and Fault Current Signals	47
4.2.2.1	Measurement of Fault Current	47
4.2.2.2	Analysis of Fault Current Signal Using FFT	50
4.5	Neural Network (NN) in MATLAB	56
4.6	Test Simulink Circuit	61
4.7	Discussion	65

CHAPTER 5 CONCLUSION AND FUTURE WORKS

5.1	Conclusion	66
5.2	Future Work	67
REFERENCES		68
APPENDICES		72
APPENDIX A		72
APPENDIX B		73
APPENDIX C		76
APPENDIX D		76

©This item is protected by original copyright

LIST OF TABLES

NO.		PAGE
1.1	Probability Of Fault Occurrence	3
4.1	A Comparison of Measured Current At Main Line and Branches When Fault Occurs in MV Network	46
4.2	Measured Fault Current for Fault at 7 Km From Substation	49
4.3	Collected Data When the Fault Occurs at 7km from HV/MV Substation For Network Without Load	54
4.4	Collected Data When the Fault Occurs at 7km from HV/MV Substation For Network Balance Load	55
4.5	Collected Data When the Fault Occurs at 7km from HV/MV Substation for Network Unbalance Load	55
4.6	Result From a Trained NN for Network Without Load	58
4.7	Result From a Trained NN for Network With Balanced Load	58
4.8	Result From a Trained NN for Network With Unbalanced Load	58
4.9	A Collected Data When Fault Occur at 27, 50 and 62 Km	61

LIST OF FIGURES

1.2	Current Flows in Circuit When Faults Occur	3
2.1	Lattice Diagram for One Line to Ground Fault	14
3.1	Project Flowchart	26
3.2	IEEE 34 Node Test Feeder	27
3.3	Main Window, Multiple Circuit Windows, & the Floating Selection Menu, of ATP/EMTP Program	28
3.4	Design MV Network	31
3.5	Load on MV Network	31
3.6	Location of Fault in the Modelled Network	32
3.7	Current Fault Signal When Occurred at 7 Km From HV/MV Transformer	33
3.8	Original Waveform in EMTP & its Transformation Using FFT	34
3.9	Block Diagram for Neural Network Element	36
3.10	Input Data and Targets in MATLAB	37
3.11	Percentage of Training, Validation and Testing of The Data	38
3.12	Simulink Circuit of Developed ANN Model	39
3.13	Flowchart of Fault Location Algorithm	42
4.1	Location of Measured Fault Current in MV Network For Faulted Branch and Phase Detection	43
4.2	Fault Current Measure From The Main Line	44
4.3	Measured Current Signals When Fault Occur at B8	45
4.4	Fault Current Signal When Fault Distance is 7km	49
4.5	Relationship Between Fault Location and Fault Current	50
4.6	Example of Analyze Fault Current Waveform in FFT When Fault Occurred at 7 Km at Balance Load on Network	52
4.7	Relationship Between Fault Location and Magnitude of The Domain	53
4.8	Number of Input and Output Were Tested in NN Fitting Tool Box	56

4.9	Regression Data	57
4.10	Relationship Between Simulated Fault Distance and Distance Estimated	59
4.11	Architecture of Neural Network for Estimate The Fault Distance	60
4.12	Test Simulink Circuit	64

©This item is protected by original copyright

LIST OF ABBREVIATIONS

DC	Direct Current
AC	Alternating Current
CT	Current Transformers
SLG	Single line-to-ground fault
LL	Line-to-Line faults
DLG	Double Line-to-Ground
LLL	Balanced three phase faults
MV	Medium Voltage
EMTP-ATP	Electromagnetic Transient Program-Alternative Transient Program
DWF	Discrete Wavelet Wilter
FIR	Finite Impulse Response
DFT	Discrete Fourier Transform
GPS	Global Positioning System
GPRS	General Packet Radio Service
AI	Artificial Intelligence
ANN	Artificial Neural Networks
NN	Neural Network
LCC	Line / Cable
COG	Coefficient Of Grounding
TL	Transmission Line
FFT	Fast Furrier Transfer
$ A $	Magnitude of Current Signal
$ A _{FFT}$	FFT Magnitude of Current Signal
F	Fault
V	Voltage

V_{L-L}	Voltage line-to-line
V_{L-N}	Voltage line-to-neutral
I	Current
R	Resistance
L	Inductor
Hz	Hertz
Ω	Ohm
%	Percentage

©This item is protected by original copyright

Algoritma Lokasi Berdasarkan Rangkaian Neural Buatan Untuk Kerosakan Talian Ke Bumi Dalam Sistem Voltan Pengagihan Sederhana

ABSTRAK

Projek ini khusus untuk mengesan dan mencari kerosakan talian tunggal ke bumi yang berlaku pada talian penghantaran di jaringan-jaringan voltan sederhana. Kerosakan talian tunggal kebumi adalah yang paling biasa berlaku berbanding kerosakan lain. Untuk mengesan dan mencari lokasi kerosakan tunggal fasa kebumi di rangkaian-rangkaian voltan sederhana, algoritma mencari lokasi kecacatan berasaskan rangkaian neural buatan telah dibangunkan untuk mencapai matlamat ini. Pada mulanya, rangkaian voltan sederhana ini direka bentuk dengan menggunakan Program Fana Elektromagnet-Program Fana Alternatif (EMTP-ATP) mengikut suatu rangkaian sebenar (IEEE 34 penyuaip). Selepas itu rangkaian disimulasi dengan mensimulasi pelbagai kerosakan di lokasi-lokasi yang berbeza. Tambahan lagi, suatu rintangan bumi telah diubah dan semua data yang telah digunakan, direkodkan untuk membangunkan algoritma lokasi kerosakan berasaskan rangkaian neural buatan. Isyarat kerosakan diukur dalam program EMTP tersebut. Juga, isyarat yang diperolehi telah dianalisa dengan menggunakan Penjelmaan Fourier Pantas dalam MATLAB untuk mengira tiga domain tertinggi yang pertama. 150 kecacatan telah disimulasikan pada rangkaian-rangkaian voltan sederhana untuk menjana isyarat arus kerosakan. Data telah dikumpul, diukur dan isyarat dianalisis. Data telah dilatih dan diuji dalam rangkaian neural di MATLAB untuk membangunkan algoritma. Algoritma yang dibangunkan dapat menganggarkan lokasi kecacatan tunggal talian kebumi yang disimulasikan di jaringan-jaringan voltan sederhana. Dari perbandingan di antara semua kecacatan lokasi yang disimulasikan dan semua lokasi yang dikesan dalam algoritma lokasi kerosakan yang dibangunkan, didapati bahawa jumlah ralat di antara mereka adalah kecil dan ralat tersebut kurang dari 0.7 km. Kemudian, berdasarkan algoritma yang dibangunkan, litar Simulink dijana dan diuji untuk mengesan kerosakan tunggal talian kebumi yang mungkin berlaku di rangkaian voltan sederhana tersebut di masa hadapan.

Fault Location Algorithm Based on ANN for Single Line-To-Ground Fault in MV Distribution System

ABSTRACT

This project was focused to detect and locate the single line-to-ground (SLG) fault which occurs on transmission lines in MV networks. SLG fault is the most common compared to other faults. To detect and locate single-phase ground faults on MV networks, the ANN based fault location algorithm was developed to achieve this objective. In beginning, the MV network was designed by using Electromagnetic Transient Program-Alternative Transient Program (EMTP-ATP) according to a real network (IEEE 34 feeder). After that the network was simulated by creating faults at different locations. In addition, an earth resistance were changed and all the data which was used, is recorded to develop the ANN based FL algorithm. The fault current signal was measured in the EMTP program. Also, were analyzed captured signals by using the Fast Fourier Transform (FFT) in MATLAB to calculate the highest first three domains. 150 fault locations were simulated on the MV network to generate fault currents. The data is gathered from simulated fault currents. The data was trained and tested in the neural network in MATLAB to develop the algorithm. The developed algorithm is able to estimate a location for SLG faults which were simulated on the MV network. From a comparison between all location faults which were simulated and all locations which were detected in the developed FL algorithm it was found that the total error between them was small and the error is less than 0.72 km. Then based on the developed algorithm, the Simulink circuit was generated and tested to detect a SLG fault which may occur in the MV network in a future.

CHAPTER 1

INTRODUCTION

1.1 Introduction

The electrical power industry is a main part of any country. Typically, there are three parts for any power system: generation, transmission, and distribution. All of them are essential for the entire power system. In recent years, the power system is increasingly developed. The transmission lines are longer and longer. The voltage level on transmission line is also higher and higher. However, the faults of the transmission lines are difficult to avoid. Those faults imperil the safety and the reliability of the power system. The longer the power failure, the greater the damage caused. Therefore, quickly locating the fault location and retrieving power supply are desired by all utilities. In order to fix the fault swiftly, detecting the accurate location of fault is the key. Consequently, the estimation of fault location in the transmission line is very important to electric engineers and utilities.

The fault occurs in electrical network due to a variety of different factors as lightning ionizing air, wires blowing together in the wind, animals or plants coming such in contact with the wires, and salt spray or pollution on insulators (Singh, M., Panigrahi, B. K., et al. 2011).

Two types of faults which occur on any transmission lines: unbalanced fault and balanced fault, which are also known as asymmetrical and symmetrical fault, respectively. Generally the faults that occur on the electrical power network are unbalanced faults.

1.2 Single Line to Ground Fault

Single line to ground fault exceedingly common compare with all others types of shunt fault. There are four types from shunt fault which occur on three-phase transmission line.

- Single line-to-ground faults (SLG)
- Line-to-line faults (LL)
- Balanced three-phase faults (LLL)
- Double line-to-ground (DLG) faults

Figure 1.1 shows how the current flows in circuit when these faults occur. Power systems have been in working for more than hundred years now. Cumulative expertise shows that all faults are not evenly probable. Single line-to-ground (SLG) faults happen the most. Whilst the least frequent is the three-phase fault (LLL) fault due to simultaneous short circuit between all the three lines, as shown in Table 1.

Fault Types

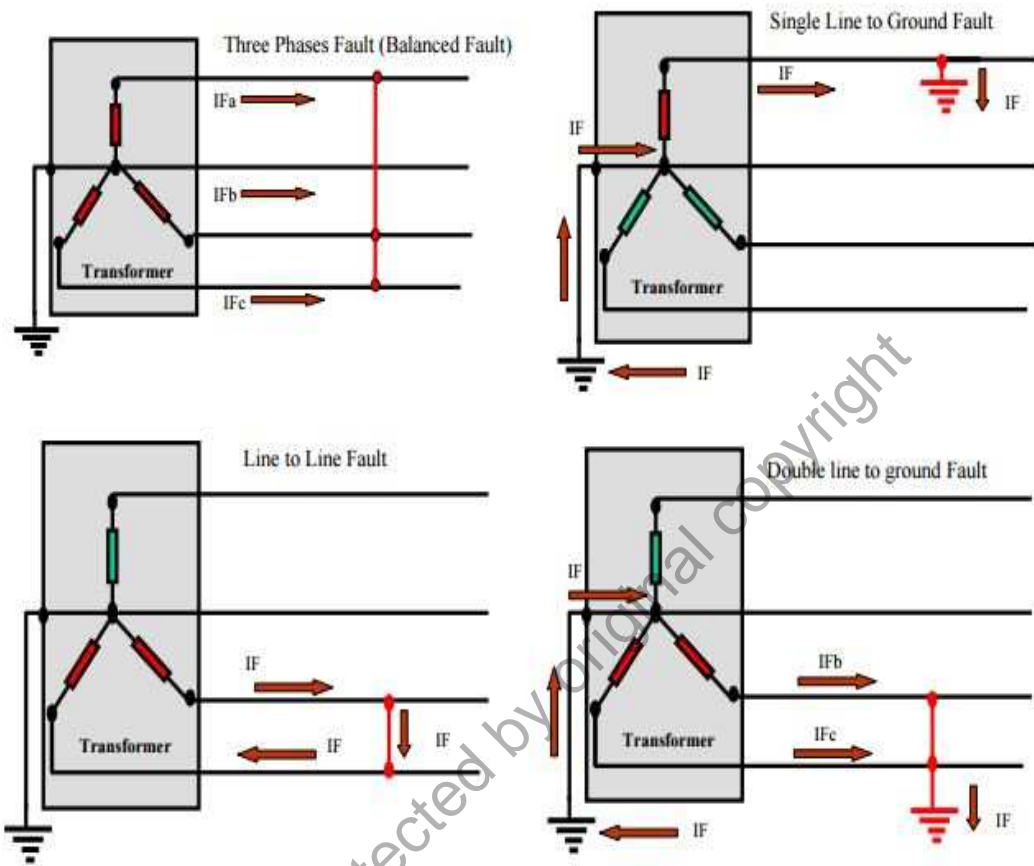


Figure 1.1 How the Current Flows in Circuit When These Faults Occur

(A. M. Baseer, et al. 2013).

Table 1: Probability of Fault Occurrence (A. M. Baseer, et al. 2013)

Type fault	Probability of occurrence (%)	Severity
L-G	70 - 80	Lowest
L-L	8 - 10	Lower
L-L-G	5 - 7	Higher
L-L-L	2 - 3	Highest

Single phase to earth faults in MV network is the most common from other faults in power distribution networks about 50% to 80% of the faults are of this type. In 2010, a fault statistic studied by utility company in Dresden Germany shows that 75% of all faults are single line to earth faults (Mohd Adzman , et al. 2014). Also, above 80% of the faults were measured involved only one phase either in connect with ground or with the neutral (Shimaa Barakat , et al. 2014).

1.3 Problem Statement

This project focuses on the single line-to-ground faults that occurs in MV network system. Previously, the conventional method for detecting fault location is by searching along the line by using the fault locating equipment which could be time consuming. The main problem is when the SLG fault occurred in the medium voltage network; the voltage decreases while the current increases and effects on the whole network system.

Therefore, the fault must be detected and selected its location exactly in the network to be cleared. The sensitivity and accuracy of the equipment for detecting the fault location in the network is very important in the system. Because the fault might exceed to be three-phase to ground fault and the problem will be bigger than single line to ground fault. For that reason, this project will design medium voltage (MV) network and develop fault locating algorithm to detect the fault and select the line location in the shortest time to be repaired and restored to the network as soon as possible.

1.4 Objective

The objectives of this project are:

- a) Design a typical MV network using Electro Magnetic Transient Program (EMTP/ATP).
- b) Simulate a single line to ground fault in medium voltage (MV) network and analyze a captured earth fault signal using signal processing techniques.
- c) Develop a fault location algorithm of single line to ground fault in medium voltage (MV) network based on ANN method.
- d) Generate a Simulink circuit based on developed ANN model to locate the actual fault location.

1.5 Scope of Research

The scope of this project is to simulate a single line to ground fault on solidly grounded MV network. The MV network was designed using ATP/EMTP program. The properties of fault signals are studied and collected these data are later used to develop a fault locating algorithm. In addition, Simulink circuit is generated after the data was tested using ANN model in order to locate the actual fault in the network.

1.6 Organization of the Thesis

The rest of this thesis are orderly organized into four chapters. **Chapter 2** presents an overview of the concerning studies. **Chapter 3** fundamentally discusses the methodology of this project, which comprise design MV network at different types of load and simulate many faults on this network and set out in block diagrams. **Chapter 4** shows how the data was collected and tested after simulating the fault to develop ANN algorithm to locate the actual fault when occurs on network. **Chapter 5** concludes the research methodology, results and the future work.

©This item is protected by original copyright

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

In this thesis the research work is related on developing fault location methods for earth fault that happens in distribution network transmission lines. Single line-to-ground fault is the most common problem in power distribution network. Several researchers and engineers had study this problem in their research and adopted varies methods for locating the fault.

There are three steps to locate a single line-to-ground fault location: the first one is faulted line selection, fault section determination and determining the fault point (Jing, et al., 2009). There are some achievements were made for the first two parts, but the effective solutions at the last part is not acquired yet. So, how to accurately locate a single phase to ground fault is still a research focus. Due to the characteristics of the single phase to ground fault in distribution network, this chapter introduces and present several methods that were used to analyze the fault and determine the fault location.

2.2 Wavelet Method

When a single line-to-ground fault happens, the fault path inductance of the fault line comprises a series of collected positive, negative and zero inductance. The inductance fault is described as follows (Lehtonen et al., 1992):

$$L_f = \frac{1}{3} (L_{1,p} L_{1,n} L_{1,0}) \cdot l \quad (2.1)$$

In which l signifies the fault distance *and* $L_{1,p}$, $L_{1,n}$, $L_{1,0}$ signify the inductance per unit length of positive, negative and zero sequence systems. A fault location algorithm instituted on wavelet transform was presented by Hänninen et al., (2001) to appreciate the fault path inductance of the fault line length by utilizing the transient signal. According to (Hanninen et al., 2001), the fault path inductance can be estimated based on the following equation:

$$L_f = \frac{1}{w} \text{imag} \left[\frac{U_w(K\Delta t, f)}{I_w(K\Delta t, f)} \right] \quad (2.2)$$

In which $U\omega$ and $I\omega$ denote the congregation wavelet coefficients of current and voltage while ω denotes the angular frequency. According to (Hanninen et al., 1999), the initial algorithm searches for the maximum wavelet coefficient of the current includes amplitude, frequency and the location of the wavelet. This frequency uses several time which the equivalent fault inductance can be calculated. The 2 ms inductance, corresponding to 10 sub estimates, is then measured with the smallest standard deviation. The average value of the inductance, calculated in this interval is finally used to define the fault distance. In the study conducted by (Imris et al., 2006), it is discovered that researcher deals with an earth fault in sub transmission networks. Their research relates to transient-based ground fault location by employing charge transient. (Imris et al., 2006) further proposed the use of discrete wavelet filter (DWF),

the FIR filter with the Gaussian wavelet and amplitude correction in filtering specific coefficient of transient component. Instead of using *DWT* in many frequency scales, *DWF* only uses a single scale where the transient is of interest. However, the method still requires a pre-processing technique to locate the specific transient frequency. This is done by using discrete Fourier Transform (*DFT*). The equation of *DWF* is illustrated below:

$$DWF[n] = \frac{2}{\alpha\sqrt{2\pi}\delta} \sum_n x[n]. e^{-\left(\frac{(n-b)/a}{2\delta^2}\right)^2 + jw_0(n-b)/a} \quad (2.3)$$

In which $x[n]$ which indicates a discrete function of the samples is a scaling factor while b is the translation of $\delta = \sqrt{3/2}$, $\omega_0 = 5.336 \text{ rads} - 1$ and n is an integer variable parameter which represents discrete time. In Equation (2.3), the scaling factor is calculated from sampling frequency (fs) and the filtered frequency of the charge transient (fc) as $a = fs/fc$ (Imris et al., 2006).

2.3 Fourier Transform Method

An algorithm based on Fourier transforms method was suggested by (Igel, et al., 1990). Solve the line impedance in the frequency domain is the basic idea for FFT. In event first order line model, the resistance of the fault line length is obtained as the imaginary part of the impedance calculated from the corresponding frequency spectrum identical of currents and voltages of the faulty phase (Igel, et al., 1990). The distance to earth fault location is calculated as follows:

$$Z = \frac{U(\omega)}{I(\omega)} \quad (2.4)$$

$$l = \frac{3\text{Im}(\underline{Z}(\omega))}{(L_{1,0}(\omega) + 2L_{1,p}(\omega))\omega} \quad (2.5)$$

Where, l , distance single line – to – ground fault location, $\underline{Z}(\omega)$, $\underline{U}(\omega)$ and $\underline{I}(\omega)$ are the frequency (ω) component of impedance, measured voltage and current, $L_{1,0}$ and $L_{1,p}$, are the inductance per unit length of zero- and positive-sequence per length of the faulty line. As explained in (Igel, et al., 1990), the fault distance is calculated as a weighted average of the rating made for the dominating frequencies in the spectrum. Likewise a higher order model, which authorize for the phase to earth capacitances, is offered in (Igel, et al., 1990).

2.4 Differential Equation Method

The network ability to model through a simple first order model of a RL-circuit in an ground fault in electrical power network .The current and voltage signals for fault phase as the following relation (Phadke, et al., 2009):

$$u_{(t)} = R \cdot i_{(t)} + L \frac{d_i}{d_t} \quad (2.6)$$

Where $u_{(t)}$, $i_{(t)}$, R and L are the voltage, current, resistance and the inductance of the faulty phase, respectively. According to (Phadke, et al., 2009), the differentiation is sensitive to higher frequency noise and can be solved by using above equation is done by using the integration technique. With samples of voltage and current signal, inductance L is calculated by using three equally spaced pairs of voltage and current using trapezoidal rule as follows:

$$L = \frac{\Delta t ((i_{k+1} + i_k)(u_{k+2} + u_k) - (i_{k+2} + i_{k+1})(u_{k+1} + u_k))}{2 ((i_{k+1} + i_k)(i_{k+2} - i_{k+1}) - (i_{k+2} + i_{k+1})(i_{k+1} - i_k))} \quad (2.7)$$

An earth fault transient signal has been applied to the differential equation method by (Schegner, et al., 1989). The total length of the time window was 16 to 24 samples, with a sampling frequency of 10 kHz. Differential-equation algorithms work according to theory for all the voltage and current components which state Equation (2.7). The preferable result is, however, obtained if all the other frequencies are first distilled out, exclude the charge transient (Lehtonen, et al., 1992).

2.5 Impedance Method

This method assumes that the transmission line is uniform in which the fault loop impedance could be calculated in accordance to the value of the current and voltage that were obtained during the fault. The length of the line is proportional to the impedance. Thus, the distance that measures between the device installed point to fault point is investigated finally as a result (Ge et al., 1993).

The line parameters affect the precision of the fault location in the distribution network. This research puts the malfunction location zone which also denotes the single line based on double end impedance method without data synchronization. It also depends on the analysis of the fundamental knowledge of the location of fault as mentioned by (Li et al., 2011).

It also derives from the measured rang equation of the SPG fault in the distributing network. In actual fact, there are two steps that need to be taken when employing this method. Firstly, both proper frequency sinusoidal signal and resistor sensation are applied on the line. This is followed by the measurement conditions of initial and terminal points of the transmission line and also some of the electrical extents

which are obtained when the circuit reaches a stable state. Next, the measurement of the fault distance supposedly exists in relation with the positive component sequence that is present in every type of fault of the symmetrical component method. Nonetheless, the said method overcomes only the weaknesses of the positioning of the dead zone of the travel wave method and the accuracy of the location. Fundamentally, the inaccurate line second root is not affected and it is also non-solved derivation. This method can be easily programmed without of step sampling and parameters. However, this method only realizes the fault in each line that is without any branch. The fault location in multi-branch has been supported by the theory though the specific method still requires further research to prove its ability.

2.6 Traveling Wave Method

Several methods are used to detect fault location in which one of the methods is known as the traveling wave method. According to (Li et al., 2011), fault location occurs when discrepancies exist in between the traveling waves of normal phase and fault phase. The basic understanding sees that the transmitting pulse is directly affected by the normal phase and fault phase, which then records the reflection of traveling waves. Later, it compares the waveforms that are responsible in both the normal and fault phases. Finally, the detected fault location is judged based on the characteristics of the wave in the fault section. Discriminating both the characteristic waves in the fault location point and the reflection wave in branch nodes prove to be challenging. This is because these are negative pulse waves. Therefore, in defining what the distance of the fault is, the two waves need to be subtracted.