



**POKA YOKE FOR SOLVING HIGH DISPOSAL
SCRAP PROBLEM AT HAND LAY-UP PROCESS
AT AEROSPACE COMPOSITE MALAYSIA**

by

**NIK NOOR ZILAWATI BINTI NIK AB RAHMAN
(1532421596)**

A dissertation submitted in partial fulfillment of the requirements for the
degree of
Master of Science (Manufacturing Systems Engineering)

**School of Manufacturing
UNIVERSITI MALAYSIA PERLIS
2018**

ACKNOWLEDGMENT

The success and final outcome of this project required a lot of guidance and assistance from many people and I am extremely fortunate to have got this along this the completion of my project work. Whatever I have done is only due to such guidance and assistance and I would not forget to thank them.

I respect and thank Dr Muhammad Iqbal, supervisor of Final year project for giving me an opportunity to do the final year project with him and providing us all support and guidance which made me complete the project on time. I am extremely grateful to him for providing such a nice support and guidance through he had busy schedule managing the company affairs.

I owe my profound gratitude to our gratitude to my project guide or mentor Mr Shihabudin, who is lecturer on School of System Electric and took keen interest on the project work and guided me all along the progress of the project by providing all necessary information for developing a good system.

I would not forget to thanks Mr Nazuan of ACM Company for their unlisted encouragement and more over for their timely support and guidance during the progress of the project.

The help and guidance given by them from time is useful for current and future working life. I have been move from such as a beginner and all my achievement reflect on how good they are through the guidance given from them.

TABLE OF CONTENTS

	PAGE
Chapter 1	
INTRODUCTION	
1.1 Background of the Study	1
1.2 Target Company and background	2
1.3 Problem statement	5
1.4 Research Objectives	6
1.5 Research Scope and boundaries	7
1.6 Significant of Study	8
Chapter 2	
LITERATURE REVIEW	
2.1 Introduction	9
2.2 Foreign Objective Debris (FOD)	9
2.3 Design, Measure, Analyse, Improve, Control (DMAIC)	14
2.3.1 DMAIC methodologies	16
2.4 Statistical Analysis Tools	22
2.4.1 Check sheet	23
2.4.2 Pie Chart	24
2.4.3 Histogram	25
2.4.4 Pareto Chart	26
2.4.5 Cause and Effect Diagram	27
2.5 Lean tools	28
2.5.1 5s	29
2.5.2 Poka Yoke	31

2.5.3	Barriers in Poka Yoke Implementation	34
2.6	BAA program	37
2.7	7 Type of Waste	37
2.8	Summary	39
Chapter 3		
RESEARCH METHOD		40
3.1	Introduction	40
3.2	Research Design	43
3.3	Phase 1: Define	43
3.4	Phase 2: Measure	44
3.4.1	Manufacturing measurement System and its Accuracy	44
3.5	Phase 3: Analyse	45
3.6	Phase 4: Improve	45
3.7	Phase 5: Control	46
3.8	Summary	46
Chapter 4		
RESULT AND DISCUSSION		47
4.1	Introduction	47
4.2	Define	47
4.3	Measure	50
4.3.1	Data collection	50
4.3.2	Process Step	53
4.3.3	Current Performance	54
4.4	Analyse	55

4.4.1	Pareto Chart	55
4.4.2	Fishbone diagram	57
4.4.3	Why Method	62
4.5	Improve	66
4.5.1	Poka Yoke	66
4.5.1.1	First Design Concept	66
4.5.1.2	Second Design Concept	71
4.5.1.3	Third Design Concept	73
4.6	Summary	81
	Chapter 5	82
	CONCLUSION	82
	REFERENCES	85

©This item is protected by original copyright

LIST OF TABLES

NO.		PAGE
Table 2.1	Phase methodologies and applicable tools	20
Table 4.1	The data had been recorded the FOD defects in 2017	52
Table 4.2	FOD Trend by Program: 2017	53
Table 4.3	Advantage and disadvantage after solution	71
Table 4.4	The data had been recorded the FOD defects in 2017	72
Table 4.5	There are 5 cases of FOD defect caused by the available tools used in hand layup process which are: washer and Teflon	82

©This item is protected by original copyright

LIST OF FIGURES

NO.		PAGE
Figure 1.1	ACM Manufacturing Process Flow.	3
Figure 1.2	Flow chart honeycomb core	4
Figure 2.1	Foreign object damage (FOD) to the compressor blades Honeywell LTS101 turboshaft engine on a Bell 2012	12
Figure 2.2	Foreign object debris on the composite material of the aircraft. Found out that an object in the material and it affect the mechanical properties.	12
Figure 2.3	The DMAIC Process	15
Figure 2.4	The example of Check Sheet	23
Figure 2.5	The example of pie chart	24
Figure 2.6	The example of Histogram	25
Figure 2.7	The example of Pareto Chart	26
Figure 2.8	The example of cause and effect diagram	27
Figure 2.9	The example of Poka Yoke	32
Figure 3.1	The flowchart methodology	42
Figure 4.1	The total number of failure mode of the product	50

from 2015 to 2017

Figure 4.2	The real case for hand layup process	54
Figure 4.3	The hand layup sequence for bagging operation	55
Figure 4.4	The first level of Pareto chart	56
Figure 4.4	The 2 nd level of Pareto chart	57
Figure 4.6	The fishbone diagram to cause and effect analysis for FOD defect	62
Figure 4.7	The FOD defect of composite material	65
Figure 4.8	The mould of hand lay-up	66
Figure 4.9	The hole on the layers of material	66
Figure 4.10	Material Teflon this Poka yoke tools	68
Figure 4.11	Washer this Poka yoke tools	68
Figure 4.12	The FOD defect in CATIA drawing	69
Figure 4.13	The second layer of composite material is layered up	69
Figure 4.14	The illustration of the concept.	70
Figure 4.15	The illustration of the concept	70

Figure 4.16	The 2 nd concept design of Poka Yoke tool in Catia software	72
Figure 4.17	The 2 nd concept design of Poka Yoke tool in Catia software	73
Figure 4.18	The 2 nd concept design of Poka Yoke tool in Catia software	72
Figure 4.19	The 3 rd concept design of Poka Yoke tool in Catia software	73
Figure 4.20	Assembly part of the design.	75
Figure 4.21	The Poka Yoke design tool in CATIA	75
Figure 4.22	The illustration of the explanation	76
Figure 4.23	The illustration of the explanation	76
Figure 4.24	The illustration of the explanation	77
Figure 4.25	The illustration of the explanation	78
Figure 4.26	The illustration of the explanation	78
Figure 4.27	The illustration of the explanation	79
Figure 4.28	The illustration of the explanation	80
Figure 4.29	The illustration of the explanation	80
Figure 4.30	Illustration of the work sequence of hand layup process.	81
Figure 4.31	Illustration of the work sequence of hand layup process.	81

LIST OF ABBREVIATIONS

FOD	foreign object debris
ACM	Aerospace Composite Malaysia
BAA	Boeing Aerostructures Australia
DMAIC	Define Measure Analyze Improve Control
RWP	Residence Work Plan
CSV	Class Sample Vector
CWM	Class Weight Matrix
CWV	Class Weight Vector
EDC	Euclidean Distance to Centroids

©This item is protected by original copyright

LIST OF SYMBOLS

A	Number of PLS or PCA components in the model
a	Number of the PLS or PCA component
b	PLS regression coefficient
b	Number of blocks (b=1,2,3.....,K)
C	Coarse APM block
C_p	Pooled covariance matrix for the two classes

©This item is protected by original copyright

Poka Yoke untuk Menyelesaikan Masalah Skrap pelupusan Tinggi pada
Proses Layanan Tangan di Aerospace Composite Malaysia

ABSTRAK

Objektif penyelidikan ini adalah untuk menunjukkan penggunaan metodologi Lean Six Sigma dalam mengurangkan kekerapan pelupusan yang tinggi dalam proses layanan tangan. Selain itu, matlamatnya adalah untuk membangunkan penyelesaian kerja bagi syarikat sasaran untuk mengurangkan masa kerja semula melalui meminimumkan kecacatan serpihan objek asing (FOD). Latar belakang teoritis dicapai melalui kaedah Lean dan Six sigma. Asas bahan komposit dan kaedah fabrikasi komposit dikaji kerana projek ini dijalankan di Perusahaan Komposit Aerospace Malaysia. Masalah kecacatan FOD yang dicadangkan oleh syarikat sasaran, dengan mengikuti proses penambahbaikan menggunakan Tentukan Pengukuran Analisis Meningkatkan Kawalan (DMAIC), Lean and Six Sigma dan menganalisis data proses dari perusahaan sasaran. Tumpuan penyelidikan ini adalah dalam memperlihatkan bagaimana menggunakan proses penggunaan DMAIC, lean and sig sigma . Untuk mengesahkan keadaan semasa sistem perkilangan, potensi peningkatan dan penyelesaian, alat statistik seperti carta Pareto dan histogram digunakan. Untuk memastikan bahawa semua keputusan adalah berdasarkan data sebenar yang mungkin, data sebenar telah dianalisis melalui gambarajah sebab dan akibat. Sebagai hasil daripada kajian ini, beberapa set rekabentuk penyelesaian dan kaedah menggunakan alatan telah dibuat.. Teknik kualiti ini dipilih dan digunakan untuk meminimumkan kekerapan pelupusan yang tinggi

Poka Yoke for Solving High Disposal Scrap Problem at Hand Lay-Up
Process at Aerospace Composite Malaysia

ABSTRACT

The objective of this research is to demonstrate the use of Lean Six Sigma methodology in a reduce high disposal scrap in hand lay-up process. Moreover, the goal is to develop working solutions for the target company to reduce the rework time through minimize the number of FOD defect. The theoretical background is achieved through exploring the literature of Lean and Six sigma. The fundamental of the composite material and composite fabrication method are studied due to this project conducted at the Aerospace Composite Malaysia Company. The FOD defect problem suggested by the target company, by following the Lean and Six Sigma improvement process DMAIC and by analysing the process data from the target company. The focus of this research is in demonstrating how to use Lean and Six Sigma improvement process DMAIC in practice. In order to validate the manufacturing system's current state, improvement potential and solutions, statistical tools such as Pareto chart and histogram were used. To ensure that all the decisions were as heavily based on actual data as possible, the actual data had been analysed through cause and effect. As a result of this study, some designs have been done using tools. As a result of this research, a set of solutions were developed by poka yoke tool.. These quality technique are selected and applied to minimize in high disposal scrap

CHAPTER 1:INTRODUCTION

1.1 Background of the Study

Quality is now involved in a various business which included manufacturing, business, hospital, school, food industry, public utilities, etc. and it is not only focusing in the field of production but the service sector. It has become the core competitiveness for many companies to improve their competitive advantage and it is essential perspective in all the field. This is because, quality of the products or services leading to commercial success, enhance competitiveness, improve customer loyalty and reduce costs. (Lachajczyk, Dudek-Burlikowaska, 2006)

On this reason, the costs which occurred from providing the high quality of product and services. The cost can be impacted by the low-quality product or unnecessary work procedure such as scrap, rework and retest and all these are more than the cost of the produce or doing it. The cost of poor quality can be divided into four classes: prevention cost, appraisal cost, failure cost (cost of internal fault and external failure costs) and discarnate costs. Internal failure costs which include failure analysis, scrap, rework, retest, and downtime while external failure cost is a compliant adjustment, return products and supplies, warranty costs, liability costs and indirect costs. Thus, to ensure the cost is minimized, it is required to find out the potential problem and identify the related problem that cause the cost of poor quality. Since the project focuses on the aerospace manufacturing industry and the company individual involved in the various aspects of producing, testing, selling, and shipping the aircraft part. The main manufacture process of the company is hand lay-up. Hand lay-up is the basic processing

procedure for composite material and it is a main material for aerospace structure. There are a lot of various type of defect able to be found in the hand lay-up process. The most significant defects in monolithic structure is porosity, cause by incorrect manufacture, and impact damage during in-service. Besides, there are still have another potential defect which can affect mechanical properties of the aircraft structure which is foreign object debris (FOD) defect. FOD is one of the potential defects that affect the quality of the aircraft. So, from FOD can cause high disposal scrap problem.

Competitor is not only from domestic or local companies but also from the international companies. Therefore, customer needs are low prices, high quality products, good services, fast delivery, etc. Continues Quality Improvement Theory (CQI) or Kaizen is one of the strategies that can help organization to satisfy customer needs and to have greater performance. To improve the quality of the product; kaizen the production and operation management for defect reduction, there are some strategies able to establish on the production process or organization, which are Six Sigma and Lean. Both of these tool is a methodology that depend on the collaborative team effort to improve the performance systematically removing the waste. Therefore, it is suitable to implement these tools on this project due to the main goal for this project are to reduce/eliminate the waste caused by the FOD defect.

1.2 Target Company and background

The target company of this project is Aerospace Composite Malaysia Sdn Bhd (ACM) owned equally by The Boeing Company and Hexcel Corporation and is located in Bukit Kayu Hitam, Kedah, Malaysia. ACM distributes and manufactures fibre

reinforced composites for wing of aircraft and flat and contoured primary (Aileron Skins, Spoilers & Spars) and secondary (Flat Panels, Leading Edges, Trailing Edges & MISC: Components) structure composite bond assemblies and sub-assemblies for aerospace industries. ACM Company is one of the manufacturer aerospace company that supplies high technology composite products to the aerospace industry and employs around 1300 people. (Boeing, 2017).

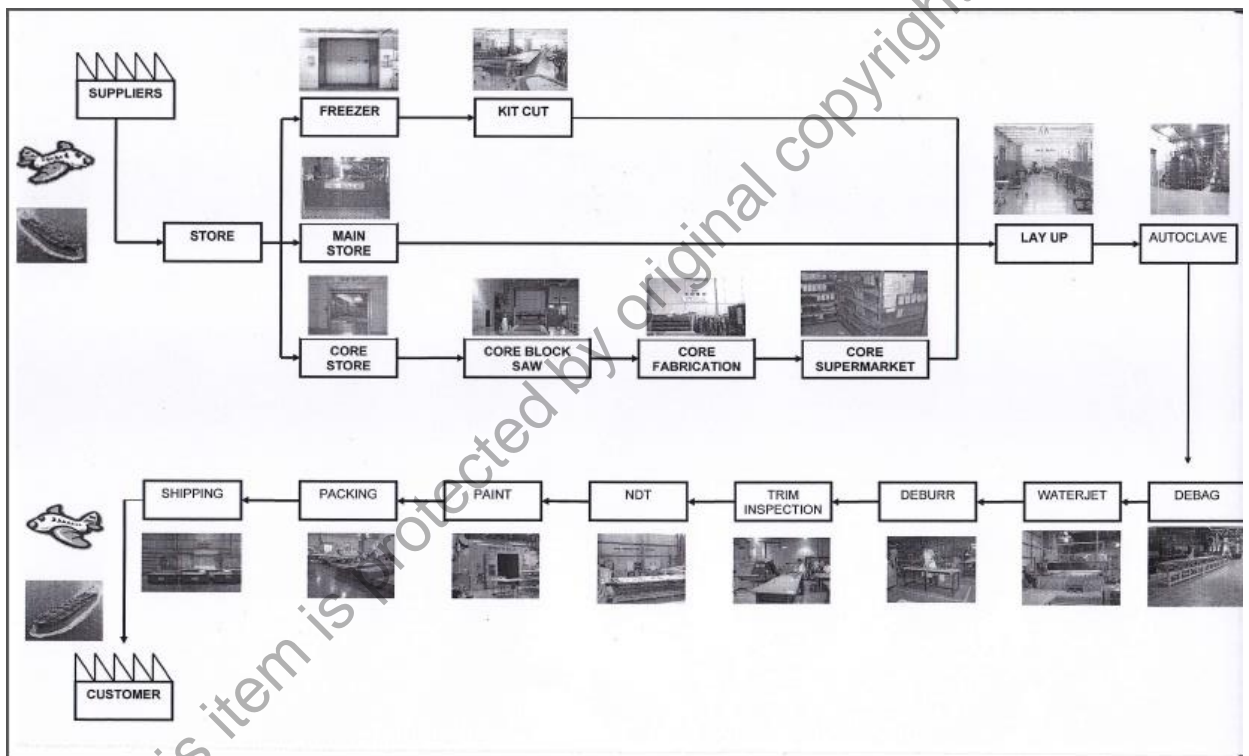


Figure 1.1: ACM Manufacturing Process Flow.

Figure 1.1 shows the ACM manufacturing process flow which Honeycomb core is the material used as a central layer material in sandwich structured composite materials. There are many type of honeycomb in market such as aluminium, aramid fibre, stainless steel and thermoplastics. In ACM manufacturing used aramid fibre, which can be classified in two categories, Nomex, and Flex core, which is bought from Hexcel Casa Grande. Always make sure to cut the honeycomb according to ribbon direction. Main defect in honeycomb is depression there are Grade 3, 4 and 5. Gred 3 is soft and Gred 5 is the hardest. Torit will absorb dust during sanding

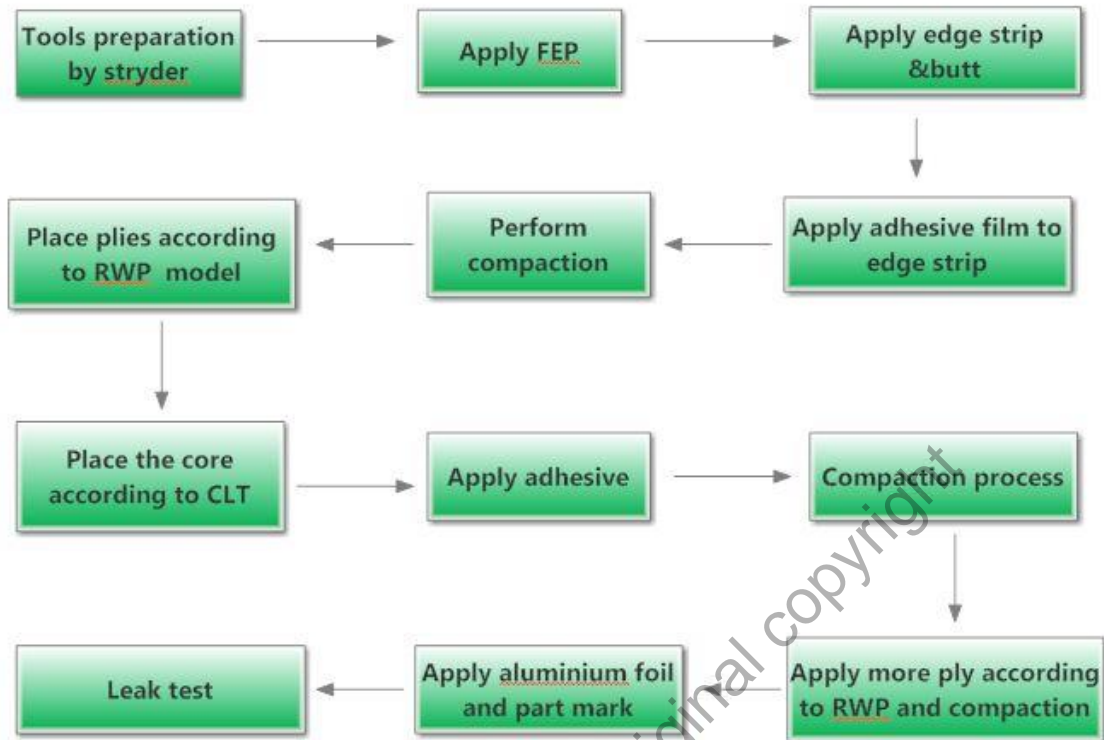


Figure 1.2: Flow chart honeycomb core

Figure 1.2 shows ACM manufacturing process flow process layout all workers are following the step to do honeycomb core according to Residence Work Plan (RWP). Strider, person in charge as runner, makes the tools preparation. Before starting process, always make sure that the tools or Lay-up Mould is match with the ply received according to the P-copy. There are five program in ACM, which are Hexcel, Boeing, BAA, CCAC and FACC. Core Locating Template (CLT) is use to locate the position to place the honeycomb core. Filler is place around the core location. Vacuum compaction is done to compact the ply and avoid delamination.

This research was initiated by ACM company desire to be able to reduce the FOD's cases due to FOD can directly threaten safety of flight crews and integrity of the aircraft. This also increase the wastes, increase rework time and spontaneously increase

the cost of the company production. The research and the related project was at the same time cooperated with the ACM team to establish Lean and Six Sigma approaches on the production area. Due to the company's request, the execution of this project depends heavily on the different ideas and tools combined under the six sigma and Lean methodology.

1.3 Problem Statement

The data collected from the target company through visiting and observation on the current situation of a production line. There was 58 pieces of FOD defect in 2014 and had dropped dramatically on 2015 which only had 28 pieces of defect on the product. The FOD defect in 2016 is 28 pieces and defect FOD in until September 2017 is 23 pieces forecast that the number of FOD defect will be maintained or will be no improved in following year. Thus, the project problem statement which is to improve the product quality through the reduction of the FOD defect. This project set a goal which reduce 20% of FOD defect from 23 piece FOD defect in 2017.

At all time, foreign object defect FOD is a potential hazard to aircraft safety. FOD cause damage and this costs are in millions of dollars every year. The type of FOD can be divided into two major part: FOD on the physical of aircraft and FOD on the structure of aircraft. FOD on the structure of aircraft are focused on this project due to it affect the mechanical properties of the aircraft, and it is one of the defects of composite material that is difficult to detect and control. FOD can inadvertently be produced or involved in composite materials, either during the manufacturing process or others work process in the industry. The manufacturing process –hand lay-up process has the potential for

causing a wide range of FOD due to this process is manual and required human workforce. In either case there is the potential for the inclusion of foreign bodies ranging from backing film to just greasy mark from a finger. The defect not only cause the rework's process, a cycle time of the production and also increase the expense/ cost of the production. Thus, the research proposed to demonstrate how poka yoke approaches in the manufacturing process to reduce the number of FOD defect.

1.4 Research Objectives

The outline of aim which wants to achieve from the project,.

- a) To identify the root cause of FOD defect in hand lay-up process.
- b) To design a poke yoke tool to reduce high disposal scrap problem in hand lay-up process

1.5 Research Scope

This research focused on the manufacturing production process hand lay-up which is the traditional and manual method for manufacture of fibre enforced These composite material is the main material for making the wings of the aircraft and is the main production in ACM Company. The reason of studied the manufacturing process-hand lay-up which for understand the procedure, technique, common defect, and basic concept when operating the hand-layup process. In this research, the tools and frameworks used are all linked to Lean and Six Sigma, in other words, the paper will discuss Lean and Six Sigma methodologies. Lean and Six methodologies relies on a collaborative team effort to improve performance by systematically removing waste and

reducing variation. The goal of this research is to demonstrate how these Poka yoke tools can be used in an improvement project in term of reduction the FOD defect of an industrial and to present a set of solutions for the target company's manufacturing.

In this research, the tools and frameworks used are all linked to Poka yoke, in other words, the report will discuss Poka yoke methodologies. Poka Yoke methodologies relies on a collaborative team effort to improve performance by systematically removing waste and reducing variation. Hence, the goal of this study is to demonstrate how these tools can be used in an improvement project in term of reduction the FOD defect of an industrial and to present a set of solutions for the target company's manufacturing. The choose poke yoke tool to reduce the defect in the part.

The goals and scope for this research can be summarized in the following way:

- Demonstrate how Poka Yoke can be used in a project and improvement the quality of the product through reduction of FOD defects.
- Create a set of working solutions through which the target company can reduce its high disposal scrap problem.

1.6 Significant of Study

FOD is a potential defect that causes of aircraft damage. It is involved in the safety case and quality control concept in any aerospace, manufacturing, warehouse, shipping, military or similar environment such as small debris, loose objects, and even fingerprint from human also have the potential to cause.

As to overcome this problem, this study is to propose the solution for reducing the FOD defect on the hand lay-up process. So, the research focused on design poka yoke tool of Poka yoke improvement process DMAIC for FOD defect reduction. Quality is about making a product to meet the personal satisfaction of a customer about the quality or value. Therefore, in what regards Poka yoke, the concern is not only to "do the things right" but also to "do the right things right". The key elements it aims at are achieving the best quality, the lowest cost, stressing on waste elimination. The requirements of a company for its implementation and the strategy to obtain the maximum practical outcome investigated.

©This item is protected by original copyright

CHAPTER 2: LITERATURE REVIEW

2.1 Introduction

This chapter 2 discussed the study/research that main finding and as well as some additional finding which respect study research problem and objective. More over this chapter is devoted to the review of literature, which include concept of material composite in structure of aerospace, the properties of the material composite, and the manufacturing process in structure of material composite.

The construction of the material in aerospace structures are becoming more important. Aircraft part, such as fairing, spoilers, and flight controls, spark, aileron skins, spars were made from composite material and this was developed during the 1960s for the weight saving purpose. New generation of large aircraft structure design and all the fuselage and wings, and the repair of these advanced composite materials requires a lot of understanding of composite structures, material, and tooling. Besides the reason of composite material is chosen for construction of material in aircraft which is their high strength, and corrosion resistance, relatively low weight. All these properties are main requirement in structure of aircraft.

2.2 Foreign Object Debris (FOD)

In generally, foreign object debris (FOD) is a kind of material, debris or foreign vehicles or system, may cause damage, especially in aerospace settings. FOD appeared

in the airport's air operations area (AOA) constitute a major threat to the safety of air travel. FOD possible damage to the aircraft during the critical phase of flight, which could lead to miserable loss of life and fuselage, and also it can increase the maintenance and operating cost (Bachtel, 2017). Moreover, (FOD) can cause damage that costs airlines, airports and all these costs is in millions of dollars every year. FOD is any object that does not belong in or near airplanes and, as a result, can injure airport or airline personnel and damage airplanes (Burch, 2010).

FOD can severely damage the airport and airline personnel or damage the equipment. Potential damage types include: reduce aircraft tyres, drawn into engines or becoming fixed in mechanisms and affect the flight operation. Injuries or even death can occur when jet blast propels. FOD through the airport environment at high speed (R.Smitch, 1997). On the other hands, FOD includes a wide range of material, including loose hardware, pavement fragments, catering supplies, building materials, rocks, sand, pieces of luggage, and even wildlife and also FOD is found at terminal gates, cargo aprons, taxiways, runways, and run-up pads (Burch, 2010).

There are several of source that cause the FOD. FOD can be generated from personnel, airport infrastructure such as pavements, lights, and signs; the environment such as snow; and the equipment operating on the airfield likes aircraft, airport operations vehicles, maintenance equipment, fuelling trucks, other aircraft servicing equipment, and construction equipment. Besides, weather can also be the cause of FOD due to movement. For example, wind can blow dry debris, such as sand or plastic bags, from relatively non-critical areas onto the flight area. Rain water and drainage can stream mud, pebbles and other small items along the path of least resistance (Bachtel, 2017). All these are considered FOD defect but happened in the physical of the aircraft

Moreover, FOD inadvertently be produced in composite materials or in other word, FOD can be occurred in the structure material of aircraft either during the manufacturing process or in other process during manufacturing or producing the component of aircraft. The manufacturing process has the potential for cause a wide range of FOD. For example, preparation of resin-impregnated fiber layers (pre-preg), prior to curing can be hand or machine. In either case there is the potential for the inclusion of foreign bodies ranging from backing film to just greasy mark from finger. These may also lead to additional sources of FOD caused by Butler, training or control, deterioration of the facilities, not the proper tools and equipment, improper or careless maintenance or assembly, human careless and behaviour and The fatigue and the pressure of the scheduling. (Bell, 2017)

©This item is protected by original copyright