



**Modeling of Power Response of Photovoltaic Model
Using Perturbation-Observation and Incremental
Conductance Methods**

by

**QUTAIBA MAZIN ABDULMAJEED
(1330910929)**

A thesis submitted in fulfillment of the requirements for the degree of
Master of Science in Electrical Engineering

School of Electrical System Engineering

UNIVERSITI MALAYSIA PERLIS

2016

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

ACKNOWLEDGMENT

I would like to take this opportunity to thank Allah for guiding and helping me to achieve this thesis. I dedicate to my beloved role model prophet Muhammad, peace be upon him, This Thesis would not have been possible without the guidance and the help of several individuals who in one way or another contributed and extended their valuable assistance in the preparation and completion of this study. It is a pleasure to convey my gratitude to them all in my humble acknowledgment. First, I offer my utmost gratitude to my guide **Dr. Abadal-Salam Taha Hussain**, for his supervision, advice, and guidance from the very early stage of this research as well as give me extraordinary experiences throughout the work. Above all and the most needed, he provided me with unflinching encouragement and support in various ways. Without him, this thesis would not have been completed or written. I am grateful and Many thanks go in particular to **Dr. Dina Mazana**, for his constant supervision , support, active interest , guidance and great efforts during and after research period; I dedicate My sincere thanks go to him. One simply could not wish for a better or friendlier supervisor. I am indebted to him more than he knows. I gratefully acknowledge **Dr. Hussein A. Kazem**, for his valuable advice, supervision and crucial contribution to this thesis. His involvement with his originality has triggered and nourished my intellectual maturity that I will benefit from, for a long time to come. Sir, I am grateful in every possible way. In my daily work, I have been blessed with a cheerful group of fellow students and friends at UniMAP. I would like to declare my appreciation for their constant support .Words fail me to express the deepest appreciation to thank my parents for their unending support, encouragement and prayers. Without their support, this work would not have been

possible. I dedicate to my loves, my father (Mazin Abdul Majeed), my mother Prof. Ibtisam Mohammed and my brother Hudhaifa and lovely sisters. To that person who gives everything, and never spare any effort. I dedicate all that work to her, to my wife. And to my lovely sons Mazin and Adam.

Finally, I would like to thank everybody who was important to the successful realization of this Thesis, as well as expressing my apology that I could not mention personally one by one. Special thanks to University Malaysia Perlis (UniMAP) for providing to me the suitable environment to make this project successful.

Qutaiba Mazin Abdu-Majeed

University Malaysia Perlis (UniMAP).

Email: Qutaiba7@gmail.com

TABLE OF CONTENTS

DECLARATION OF THESIS	i
ACKNOWLEDGMENT	ii
TABLE OF CONTENTS	iv
LIST OF TABLES	vii
LIST OF FIGURES	viii
LIST OF ABBREVIATIONS	xi
ABSTRAK	xii
ABSTRACT	xiii
CHAPTER 1 : INTRODUCTION	1
1.1 Background	1
1.2 Problem Statement	3
1.3 Research Objectives	5
1.4 Scope of Research Works	6
1.5 Thesis Outline	7
CHAPTER 2 : LITERATURE REVIEW	8
2.1 Introduction	8
2.2 Solar Radiation	8
2.3 Photovoltaic System Description	9
2.3.1 Photovoltaic Cell	10
2.3.2 PV Module	10
2.3.3 Batteries	11
2.3.4 DC-AC Inverter	11
2.3.5 DC- DC Converter	12
2.4 DC-DC Control	13
2.5 Control of DC-DC Converters	14

2.6	Step-Down Converter (Buck Converter)	16
2.7	Step-Up Converter (Boost Converter)	17
2.8	Effect of Variation of the Irradiation and Temperature	18
2.9	Maximum Power Point Tracking Algorithms	19
2.10	MPPT Methods	23
2.10.1	Curve Fitting (CF)	23
2.10.2	Look Up Table (LUT)	24
2.10.3	Open Circuit Voltage (OCV)	25
2.10.4	Short Circuit Current (SCC)	26
2.10.5	Fuzzy Logic control (FLC)	27
2.10.6	Perturbation and Observation (P&O)	28
2.10.7	Incremental Conductance (INC)	29
2.11	Summary	29
CHAPTER 3 : RESEARCH METHODOLOGY		31
3.1	Introduction	31
3.2	PV panel	33
3.3	The Model Validation	34
3.4	PO Method	36
3.5	Incremental Conductance (INC)	38
3.6	The two method selection	42
CHAPTER 4 : RESULT AND DISCUSSION		43
4.1	Introduction	43
4.2	The Model with All Conditions	43
4.2.1	Effect of Irradiance on Perturb and Observe method	44
4.2.2	The Effect of Temperature on Perturb and Observe method	47
4.2.3	Effect of Irradiance on Incremental Conductance (INC)	49
4.2.4	The Effect of Temperature on Incremental Conductance (INC)	52

4.3	Malaysian Conditions	54
4.3.1	Irradiation Conditions	54
4.3.2	Temperature Conditions	56
4.4	Average Result for Malaysia	58
4.5	The model Selection Information	59
CHAPTER 5 : CONCLUSIONS AND FUTURE WORK		60
5.1	Conclusion	60
5.2	Contribution	61
5.3	Future Work	61
REFERENCES		62
LIST OF PUBLICATIONS		70
APPENDIX A		71
APPENDIX B		73

©This item is protected by original copyright

LIST OF TABLES

NO.		Page.
2.1	The variation of MPPT methods.	30
3.1	The data sheet of the solar model.	34
3.2	To check the reliability if the generated model, compare the result withstander.	35
4.1	The average irradiation in different places in Malaysia .	54
4.2	The average temperature in different places in Malaysia.	57

©This item is protected by original copyright

LIST OF FIGURES

NO.		Page.
1.1	Photovoltaic model.	2
1.2	Environmental factors effect to MPP.	4
1.3	Scope of work.	6
2.1	The Solar Radiation.	9
2.2	The location of the inverter in the PV system.	12
2.3	The DC controller in PV System.	13
2.4	The full-bridge converter derived from the step-down converter.	14
2.5	(a) The average value of the output voltage V_o , (b) The switching modes on <i>ton</i> and <i>toff</i> .	15
2.6	The switch and duty ratio.	16
2.7	Step-down DC-DC converters.	17
2.8	Step-up converter.	18
2.9	Current-Voltage curve.	19
2.10	Power-Voltage curve.	19
2.11	DC-DC controllers.	20
2.12	PV system operating points with the varying loads.	20
2.13	I-V Curve under different values of radiation.	22
2.14	P-V curves under different values of radiation.	22
2.15	Look Up Table (LUT).	24
2.16	Open Circuit Voltage.	26
2.17	Short Circuit Current (SCC).	27
3.1	Research Methodology Flowchart.	32

3.2	PV equivalent circuit.	33
3.3	Block diagram of PV model.	34
3.4	The competition between the model curve and suitable curve.	35
3.5	Flow chart of the P&O algorithm.	37
3.6	P&O method.	38
3.7	INC method.	40
3.8	Shows the basis of the INC method.	41
3.9	INC method in the model.	41
4.1	P&O Irradiance 300 W/m ² & Temperature 25 °C.	44
4.2	P&O Irradiance 400 W/m ² & Temperature 25 °C.	44
4.3	P&O Irradiance 500 W/m ² & Temperature 25 °C.	45
4.4	P&O Irradiance 600 W/m ² & Temperature 25 °C.	45
4.5	P&O Irradiance 700 W/m ² & Temperature 25 °C.	45
4.6	P&O Irradiance 800 W/m ² & Temperature 25 °C.	46
4.7	P&O Irradiance 900 W/m ² & Temperature 25 °C.	46
4.8	P&O Irradiance 1000 W/m ² & Temperature 25 °C.	46
4.9	P&O Irradiance 0 °C, irradiance 1000 W/m ² .	47
4.10	P&O Irradiance 25 °C, irradiance 1000 W/m ² .	48
4.11	P&O Irradiance 50 °C, irradiance 1000 W/m ² .	48
4.12	P&O Irradiance 70 °C, irradiance 1000 W/m ² .	48
4.13	INC when irradiance 300 W/m ² & temperature 25 °C.	49
4.14	INC when irradiance 400 W/m ² & temperature 25 °C.	50
4.15	INC when irradiance 500 W/m ² & temperature 25 °C.	50
4.16	INC when irradiance 600 W/m ² & temperature 25 °C.	50
4.17	INC when irradiance 700 W/m ² & temperature 25 °C.	51

4.18	INC when irradiance 800 W/m ² & temperature 25 °C.	51
4.19	INC when irradiance 900 W/m ² & temperature 25 °C.	51
4.20	INC when irradiance 1000 W/m ² & temperature 25 °C.	52
4.21	INC when temperature 0 ° C & irradiance 1000 W/m ² .	52
4.22	INC when temperature 25 ° C & irradiance 1000 W/m ² .	53
4.23	INC when temperature 50 ° C & irradiance 1000 W/m ² .	53
4.24	INC when temperature 70 ° C & irradiance 1000 W/m ² .	53
4.25	The average irradiance in Malaysia using Perturb and Observation method.	55
4.26	The average of irradiance in Malaysia using Incremental Conductance method.	56
4.27	The Malaysian average of temperature using the Perturb and Observation method.	57
4.28	The Malaysian average temperature using Incremental conductance method.	58
4.29	The performance of the two selected methods in Malaysian average data.	59

LIST OF ABBREVIATIONS

PV	Photo voltage
D	Duty cycle
$V_{control}$	Voltage in control diode
\hat{V}_{st}	Saw tooth voltage
v_d	Regulated dc supplies
MPPT	Maximum power point tracking
K_{MV}	Voltage factor in
V_o	Opine circuit voltage
I_{sc}	Short citrcu t curent
K_{MI}	Current factor
Rsh	Shunt resistance
G	The irradiation w/m^2 (the light intensity)
Iph	The measured solar current –generated
Is	The saturation current of diode
Vt	The thermal voltage, kT/q
K	The Boltzmann constant
T_c	The temperature of Device parameter value
Q	The electron charge
N	The quality factor (diode emission coefficient)

Pemodelan Power Response Photovoltaic Model Menggunakan Perturbation Dan Pemerhatian dan Kaedah Conductance Incremental

ABSTRAK

Pencarian sumber tenaga masih merupakan satu masalah utama dalam era ini dan ia masih merupakan salah satu focus penting untuk banyak negara. Tenaga yang boleh diperbahurui menjadi salah satu trend yang cepat berkembang di industry sebab ia boleh digunakan untuk menyelesaikan masalah kekurangan sumber tenaga. Dalam masa yang sama, matahari bertanggungjawab kepada kebanyakan tenaga yang terdapat di dunia ini. Sistem photovoltaic yang mendapat tenaga daripada matahari and menukarnya kepada tenaga elektrik, merupakan salah satu penyelesaian yang terbaik untuk menyelesaikan masalah kekurangan tenaga. Dalam sistem ini, terdapat satu titik yang dipanggil Maximum Power Point (MPP) yang mewakili tenaga keluaran maksimum yang dijanakan oleh sistem. Tetapi system ini boleh diganggu oleh faktor-faktor persekitaran seperti sinaran dan suhu. Oleh sebab itu, perubahan dalam faktor-faktor persekitaran akan menjejaskan nilai MPP dan penggunaan cara pengesanan boleh mengembalikan sistem kepada nilai maksimum. Cara ini dipanggil kaedah Maximum Power Point Tracking (MPPT). Terdapat banyak kaedah dalam bidang ini dengan prestasi berbeza. Variasi ini menyebabkan kekeliruan dalam pemilihan kaedah Maximum PowerPoint Tracking. Dalam penyelidikan ini, banyak jenis kaedah pengesanan telah dikaji dan diklasifikasikan berdasarkan ketepatan, kelajuan pengesanan dan kerumitan dengan mempertimbangkan kaedah Perturbation and Observation (PO) dan Incremental Conductance (IC) kerana kaedah-kaedah ini merupakan kaedah yang paling biasa untuk memilih cara pengesanan maksimum yang sesuai digunakan di Malaysia. Teknik pemodelan telah digunakan dan diuji untuk membuat perbandingan antara dua kaedah tersebut. Model ini menggunakan sinaran dan suhu sebagai parameter input untuk memberi satu petunjuk prestasi antara variasi tenaga output dengan masa. MATLAB telah digunakan dalam penyelidikan ini. Keputusan menunjukkan masa tindak balas yang lebih baik dan prestasi yang lebih lancar apabila menggunakan kaedah Incremental Conductance (IC) berbanding dengan kaedah Perturbation and Observation (PO) untuk Malaysia.

Modeling of Power Response of Photo-Voltaic Model Using Perturbation & Observation and Incremental Conductance Methods

ABSTRACT

Since the search of the energy source considered as one of the main problems in this era, then it will be still one of the most important concerns of the countries. The renewable energy became one of the faster-growing trends in industrial societies since it becomes used for solving shortfall problem in the energy source. In the meantime, the sun is responsible for almost all the energy available on the earth. Photovoltaic systems, which gets the energy from the sun and convert it to electrical energy is one of the best solutions to solve the shortage problems. In this system, there is one point called Maximum Power Point (MPP) representing the maximum output power that can be generated from the system, but the system will be disturbed by changing the environment factors like irradiance and temperature. Therefore, the changing of environment factors will effect on the value of MPP, and make the system back to a maximum value by using the tracking methods. It is called Maximum Power Point Tracking Method (MPPT). There are many methods in this field with a different performance because this variation leads to confusion in the selection of the suitable Maximum Power Point Tracking Methods. This research has reviewed many types of tracking methods and classified them according to the accuracy, tracking speed, and complexity, by considering the Perturbation and Observation (PO) and Incremental Conductance (IC) methods being as the most commonly methods in order to choose the most suitable maximum tracking method to be applied in Malaysia. The modeling technique has been made and tested to compare between these two methods. This model uses the irradiation and temperature as inputs parameters to give a performance indication between the variations of output power with respect to time. MATLAB have been used in this research. The result shows better time response and smooths performance while applying Incremental Conductance (IC) method than Perturbation and Observation (PO) for Malaysia. Towards completion of this project, the project aimed to create a comparative model, for the two selected methods. The project other aims included adding the time response and stability factors while testing the two methods using the models based on the inputs from different states in Malaysia. When using the model for Malaysian data and taking the average irradiance and temperature for the two proposed methods, it is recommended to use the INC method, which shows faster response and better stability.

CHAPTER 1

INTRODUCTION

1.1 Background

The energy source is one of the main problems in this era and the search for it was and is still one of the most important concerns of countries. With the passage of the time, the search for the renewable energy becomes more important and to solve shortfall problem in energy source it became one of the faster-growing trends in industrial societies. To find new solutions, the project requires a large range of fields and research. In the meantime, the sun is responsible for almost all the energy available on the earth, except for tides, radioactive material, and the earth's residual internal heat. All others are converted form of the sun's energy (Hussein A K, 2011).

The Solar cells' operation depends on the semiconductor technology. The principle refers when the two semiconductors are put into contact the electricity flowing between them and uncovered to light (photons). This phenomenon is called the photovoltaic effect; Edmund Becquerel first time discovered it in 1839. In 1950, the real Actual development of photovoltaic (PV) technology began. The research continues today at industry and national laboratories around the world, focusing on the efficiencies of increasing conversion and the mass produce strategies to decrease the cost of producing PV modules (Awaya, H., et al.1999).

The solar energy and photovoltaic (PV) is one of the best solutions to these problems, especially when to consider the cost and it may give great design in a high ratio

of energy. In addition, it can be applied in huge areas around the world where the resource for it is the solar radiation, which is always available as an input shown in.

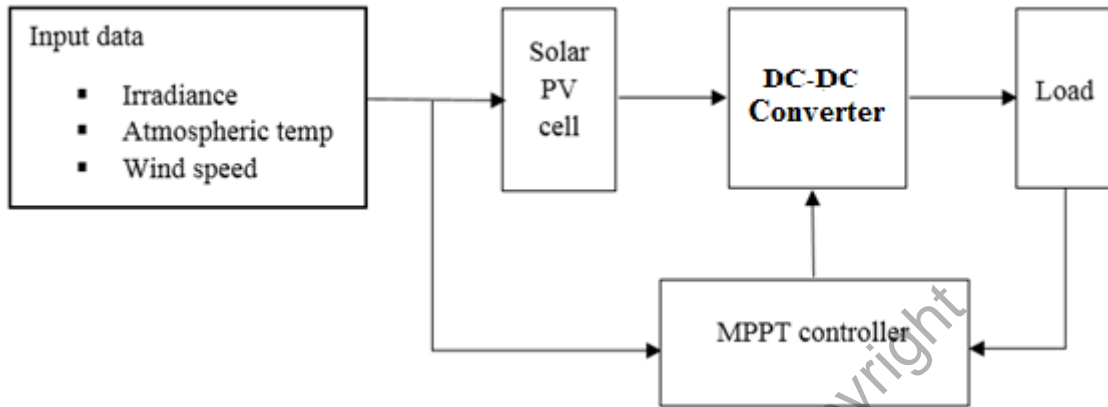


Figure 1.1: Photovoltaic model (Aliesfahani, S., & Shahbazian, M, 2015).

The possibility of solar radiation to reach the Earth's surface is great. For instance, the irradiation power for a unit area is reached up to 1000 W/m^2 . It must be accentuating that its potential is renewable and inexhaustible. (Sergey Karabanov, 2010).

Using the solar radiation is a thermal application for getting thermal power and PV conversion electrical power. Furthermore, the PV systems function based on direct conversion of solar power by semiconductor materials as shown in Fig. 1.1. Nowadays, the PV systems with a range of applications are increasing rapidly. PV systems can install power between several Watts (even less) up to several Megawatts. Due to this, PV generation has significant advantages (Brown K.E., Mitchell R.L. PV 2005).

PV is used to get electrical power from the solar radiation. It is made up of one or more PV panels and the output power is not enough to meet the requirement of buildings to allow the modules to be connected to gather as arrays. The capital cost of PV modules is the main drawback, which depends on solar radiation and area temperature (Hussein A. Kazem, Tamer K, 2013).

The maximum power point tracking is a technique used to get the maximum possible power from PV systems. The best output is not constant due to the complex factors that are effective in the system, namely solar radiation, the temperature and total resistance. The maximum power point is an optimum point to get it from a device located between PV modules and the load. To track the MPP for PV systems, there are many methods proposed to get the accurate output. (Bhatnaogar, P. & Nema, R. K., 2013).

1.2 Problem Statement

Since the PV, systems would be prone to the disturbance by the changing in the environment factors like irradiance and temperature, which affect the value of the maximum power produced by the system as shown in figure 1.2. In addition, there are many methods to return the model to work in maximum called Maximum Power Point Tracking methods

Different researchers have environmentally highlighted this problem in the latest years. Maximum Power Point Tracking is defined as one point on the photovoltaic (power- voltage) curve and (current-voltage) curve which representing the maximum generated power as shown in Fig 1.2. As this point is affected by the changes of the climate factors or load, it needs to track the maximum power point (MPP) of PV systems. Moreover, the energy conversion efficiency of PV module is getting low and will cause a mismatch between supply and load (Blackstone, B, Y., & Premrudee preechacharn, S., 2012).

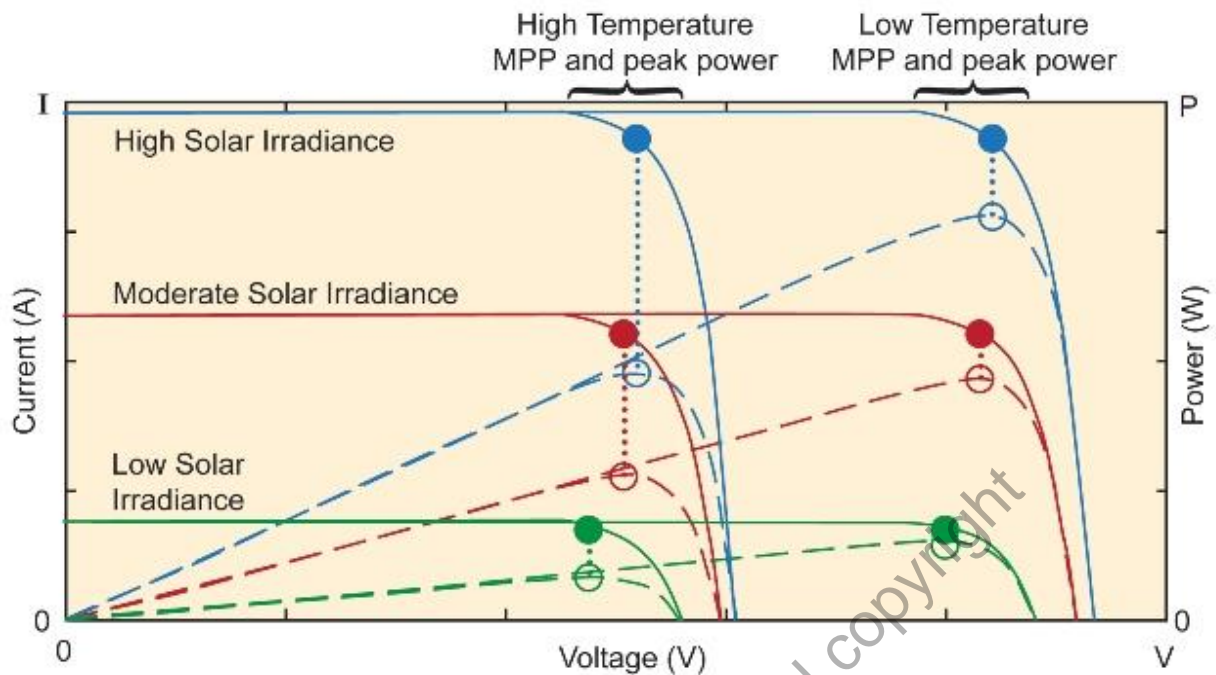


Figure 1.2: Environmental factors effect to MPP (Houssamo, I., Locment, F., & Sechilariu, M, 2010).

There are many methods for tracking the maximum power point in PV systems, either direct or indirect methods, online or offline methods. There is a variation among them in the conditions of some critical parameters like complexity, accuracy, number of variables used, speed, hardware implementation, cost, tracking efficiency and so on.

Among these too many methods, there are two main popular methods; Perturbation and Observation (P&O) and Incremental conductance (INC), and have been used widely in this field, but unfortunately, no one of them hasn't been yet standardized to be applied. All the application for these two methods in Malaysia was applied generally without any indication with certainty for any of these to be dominant. The problem can be summarized:

No selection for the optimized method to calculate the MPP, since there are many methods each one has its own advantage over the others, In addition, the comparison between the most two popular methods (P&O and INC) has been applied in Malaysia,

and the selection between these two methods is not easy because of their similarity output response results.

1.3 Research Objectives

The development of this research looks at studying the PV system and tracking methods with compare in the characteristics of tracking speed and accuracy. The main objectives of this study are to investigate the following issues:

- i. Investigate photovoltaic system and tracking methods characteristics.
- ii. Analysis and compare between the main two common maximum power point tracking methods Perturbation and Observation (P&O) and Incremental Conductance (INC)
- iii. Build a model allows the two selected methods to work in same conditions.
- iv. Change the climatic factors (irradiation & temperature) & check the result, in order to propose one method as the most suitable for Malaysia

The model includes the programming of two methods by using MATLAB 9 software to get the output as a curve. In addition, this study allows to any researcher in future to use his data and study the response.

1.4 Scope of Research Works

Photovoltaic systems have been studied by considering the variation in methods of power point tracking characteristics, this variation is based on based on clarifying these methods and comparing between the most common methods in this field namely perturbation and observation (P&O) and Incremental conductance (INC) as shown in Fig. 1.3. Moreover, create a model to compare between them and allow to others to compare or check any of them by using his data. (Khanaki.M, 2014).

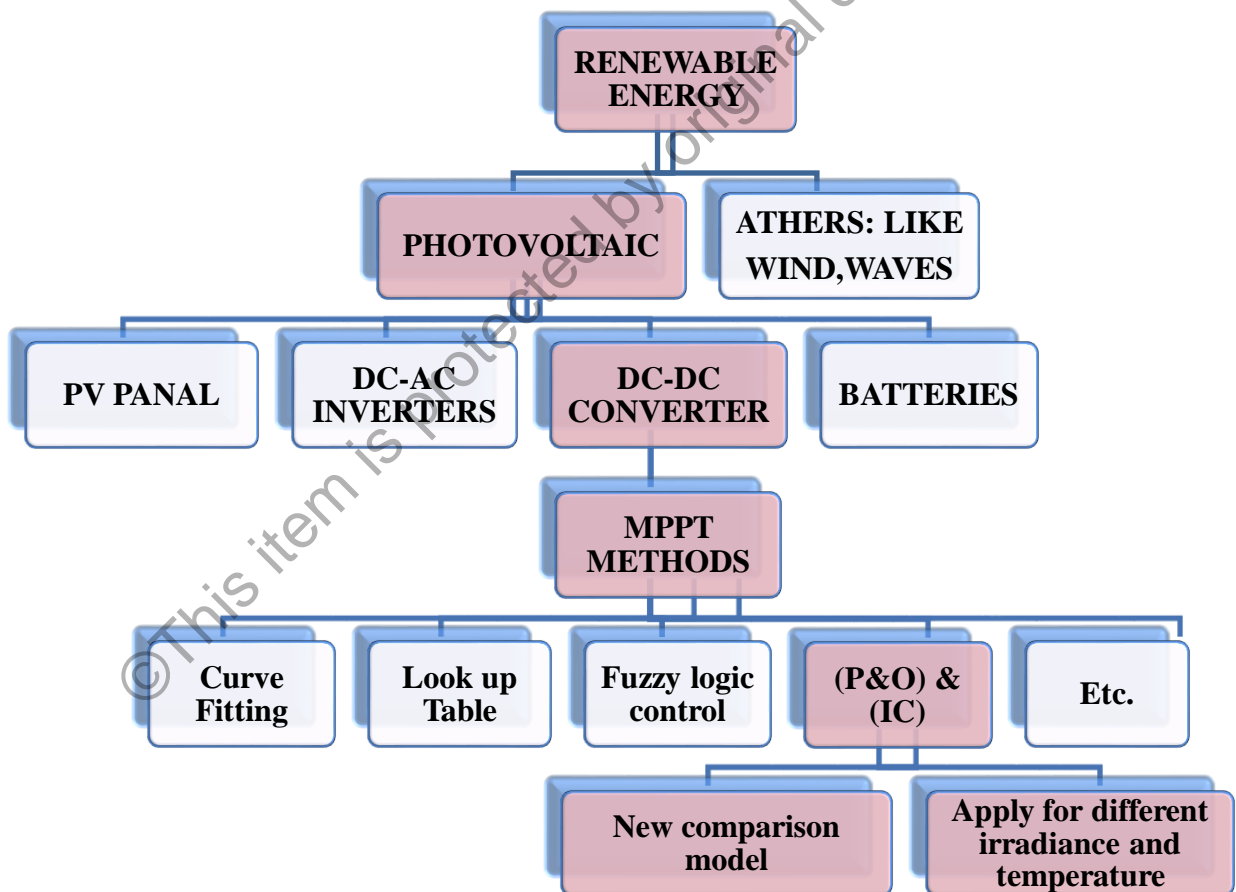


Figure 1.3: Scope of work.

1.5 Thesis Outline

In this thesis, five chapters were formed, which is, Chapter1 Introduction. Chapter 2 theory and literature survey. Chapter 3 comparative between P&O method and INC method, building a model, which allows the two selected methods to work in the same conditions. Chapter 4 Examining the response with changing climatic factors followed by checking the response, in order to propose one of these MPPT methods that are the most suitable for the whole Malaysia. Finally, chapter 5 contains the Conclusion and Suggestion for Future work.

©This item is protected by original copyright

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

When the photons of sunlight reach the solar panel and absorbed by a semiconducting material like silicon. It charges the source to take out the energy from the array of solar panels and converts the solar energy to DC electricity. Moreover, the system is usually connected in the next step directly to the load or to feed the grid (Abdulmajeed, Q. M., Kazem, H, 2013; Roopa, P., S. E., & Vengatesh, R. P., 2011).

Since the PV systems can be affected by changing of the climatic conditions, the output power will not counties in the same value, the system need method to tracking for the maximum point (Banos, R., Manzano-Agugliaro, 2011) , MPPT defined as a technique used to get the maximum possible power from photovoltaic systems. (Chowdhury, S. R., & Saha, H., 2010; Li, S., Haskew, T. A, 2011). Apart from that, the maximum power point is the optimum point that can be obtained from a device located between PV modules and the load. There are many methods proposed to get the accurate output to track the MPP for PV systems. This study reviews different MPP methods and highlights the research challenges (Balamurugan, T., & Manoharan, S, 2012).

2.2 Solar Radiation

Solar radiation reaching the ground earth and the machinery of the global solar radiation (G_T) on horizontal of the surface are shown in Figure 2.1. Solar radiation is classified as two parts: Direct solar radiation (bean radiation) (G_B) the radiation that falls

directly from the sun, and diffused solar radiations (G_D) other radiation which have been scattered because of the clouds and other particles in the sky.

$$GT = GB + GD \quad (2.1)$$

The beam radiation that makes the fall in angle with the ground is known as the altitude angle (α), the angle ζ represented the incidence from zenith. When the surface is horizontal, the incidence angle is equal to the zenith angle (θ) (Grossmann, W. D., G, & Steininger, K. W, 2013).

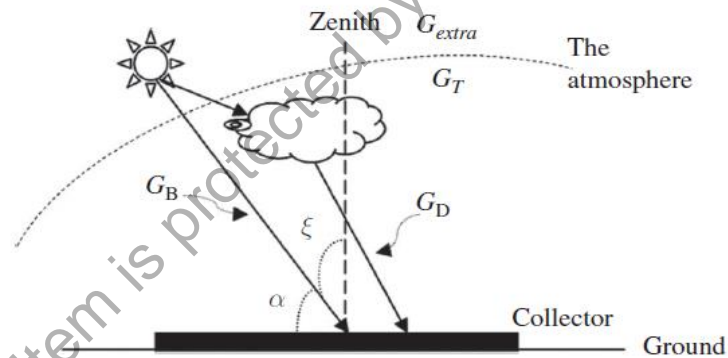


Figure 2.1: The Solar Radiation (Hocaoglu, F. O, 2013).

2.3 Photovoltaic System Description

The typical photovoltaic system consists of PV modules, photovoltaic cell, batteries, inverter (DC-AC), and controller (DC-DC). A brief description is given in this section.

2.3.1 Photovoltaic Cell

The single Photovoltaic cell comprises a thin wafer semiconductor that includes twain layers, normally made of pure silicon (there are many differed semiconductors to make the PV cell, but crystalline silicon is the most common one).

One side of the layers is doped with boron material and another is doped with phosphorous, this activity takes place to make the extra of the electrons on one side and the shortage of the electrons in another side. Once the sunlight bombards photocell, the photons in sunlight will bang some of the excess electrons. This situation leads to the difference in the voltage between the two sides try moving from the excess side to the shortfall side. This voltage in silicon is 0.5 V as both sides of metallic contacts are made of a semiconductor. Moreover, while the outside circuit is attached the contacts, the electrons back to another side as well as current will flow through the circuit. The PV cell does not have storage space capacity; it just acts like a pump of the electron. Therefore, the determined of the value of current is by the electrons number knocking the solar photons. The more cells are produced; the more electrons will be delivered by more intense sunlight. (Sanchis, P., López, J., Ursúa, A., & Marroyo, L., 2005).

2.3.2 PV Module

The design of the PV model, in the beginning, depends on the size of needs, in which the PV array for the given application relies on the energy production and expected power on an hourly, monthly or annual basis. In the PV layer, the solar cells are gathered to collect the light of the sun. This is due to the connection of the cells in series or parallel to get the required voltage and current (Yetayew, T. T., & Jyothsna, T. R., 2013).

Other than that, PV panel names the number of cells in the same board. In contrast, the different PV panels when are connected to series and parallel are named arrays. The PV systems include one or more arrays and to protect the systems, the PV panel may be covered by the glass, and usually work for 25 years (Kumari, J. S., Sai Babu, C., Lenine, D., & Lakshman, J., 2009).

2.3.3 Batteries

To store the reserved electrical energy solar, the photovoltaic systems require a battery. For instance, the system needs to store the energy during the daytime and to be used at nighttime or when required. The purpose of using batteries in PV systems is for storage. This is because the ability of the storage is the most important thing in PV systems, as it needs batteries with storage capacity for a long time. (Beaudin, M., Zareipour, H.2010).

Besides that, the storage is more important for most of the standalone PV systems (Standalone means when the units are not connecting with the grid). After the excess energy that is created by the PV system the batteries collect it and store it as an energy to be used in another time, when needed or when there is no other input of energy (Jossen, A., Garche, J., & Sauer, D. U. ,2004).

2.3.4 DC-AC Inverter

PV systems generate the DC power and since most appliances consume the AC power, the inverter is used for conversion. The purpose of the inverter is to convert DC power to AC current. The inverter is including semiconductor devices that used like